

## Representing Codes for Belief Propagation Decoding

Jonathan Yedidia, Jinghu Chen, and Marc Fossorier

TR-2003-106 August 2003

### Abstract

The best codes of short or intermediate blocklength that have so far been discovered are usually defined in ways that do not immediately suggest a sparse parity check matrix representation. For this reason, large classes of classical textbook codes, which would give excellent performance under optimal decoding, have been mostly ignored as candidates for the belief propagation (BP) decoding algorithm. A notable exception are the one-step majority logic decodable codes, which have been shown to have excellent error-correcting performance when decoded using BP. We report here on a method for generating sparse generalized parity check (GPC) matrix representations of other classical codes.

*Published in the Proceedings of the 2003 International Symposium on Information Theory, p. 176*

This work may not be copied or reproduced in whole or in part for any commercial purpose. Permission to copy in whole or in part without payment of fee is granted for nonprofit educational and research purposes provided that all such whole or partial copies include the following: a notice that such copying is by permission of Mitsubishi Electric Research Laboratories, Inc.; an acknowledgment of the authors and individual contributions to the work; and all applicable portions of the copyright notice. Copying, reproduction, or republishing for any other purpose shall require a license with payment of fee to Mitsubishi Electric Research Laboratories, Inc. All rights reserved.

**Publication History:–**

1. First printing, TR-2003-106, August 2003

# Representing Codes for Belief Propagation Decoding

Jonathan S. Yedidia  
 MERL  
 201 Broadway, 8th Floor  
 Cambridge, MA 02139  
 yedidia@merl.com

Jinghu Chen and Marc P. C. Fossorier  
 Department of Electrical Engineering  
 University of Hawaii at Manoa  
 Honolulu, HI 96822  
 {jinghu,marc}@spectra.eng.hawaii.edu

## I. INTRODUCTION

The best codes of short or intermediate blocklength that have so far been discovered are usually defined in ways that do not immediately suggest a sparse parity check matrix representation. For this reason, large classes of classical textbook codes, which would give excellent performance under optimal decoding, have been mostly ignored as candidates for the belief propagation (BP) decoding algorithm. A notable exception are the one-step majority logic decodable codes, which have been shown to have excellent error-correcting performance when decoded using BP [1]. We report here on a method for generating sparse generalized parity check (GPC) matrix representations of other classical codes.

## II. IMPROVING GPC MATRICES

An  $M$  by  $N$  *generalized parity check* (GPC) matrix representation [2] of an  $(n, k)$  binary linear block code will have  $N \geq n$  columns, and  $M \geq N - k$  rows, where the  $M$  rows span an  $N - k$  dimensional sub-space.

The BP algorithm seems to work best on GPC matrices that have the following characteristics:

1. The number of ones in each row is small.
2. The number of ones in each column is large.
3. For all pairs of rows of the matrix, the number of columns that have a one in both rows is small; ideally zero or one.

We developed an algorithm that improves GPC matrices in all three of these characteristics; but the new GPC matrices also have additional auxiliary bits, and because there is no evidence from the channel to determine the value of these bits, they may cause performance to deteriorate on channels other than the binary erasure channel (BEC).

Given an  $M$  by  $N$  input GPC matrix  $H$ , our algorithm outputs an  $M'$  by  $N'$  GPC matrix  $H'$ . The basic idea behind the algorithm, which is described in detail elsewhere [3], is to re-write constraints involving large numbers of bits by using auxiliary bits that encode the parity of sets of bits. Using this “divide-and-conquer” approach, we try to minimize the number of bits involved in each constraint by re-writing the constraints in terms of sets of bits that are as large as possible. We also try to use as many redundant constraints as possible.

## III. RESULTS FOR A EUCLIDEAN GEOMETRY CODE

We present some empirical results obtained applying our method on a  $(n = 255, k = 127)$  Euclidean geometry (EG) code. In the notation of [4], the code we studied has parameters,  $m = 4$ ,  $s = 2$ , and  $\mu = 1$ . In the geometric interpretation of this code, each bit corresponds to a point, there are  $21 * 255 = 5355$  lines each consisting of four points, and there are also 5355 planes consisting of four parallel lines. This code

can be represented by a redundant parity check matrix  $H$  with  $M = 5355$  and  $N = 255$ , where each row has weight 16.

Applying our algorithm to this input GPC matrix  $H$ , we obtain an output GPC matrix  $H'$  with  $M' = 32130$  and  $N' = 5610$ . The weights of the rows are either four or five. Results using BP decoding with these matrices on the BEC are shown in Figure 1, where we have also shown the performance of BP decoding of regular  $(3, 6)$  Gallager codes and maximum likelihood (ML) decoding of random linear codes with parameters  $(n = 256, k = 128)$  [5].

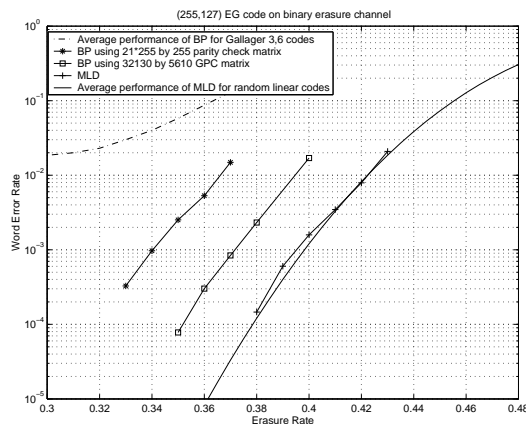


Figure 1: Performance of EG (255, 127) code on the BEC.

The results using BP decoding with  $H$  are already quite good—much better than BP decoding of Gallager codes. This is a consequence of using highly redundant parity check matrices with 5355 rows instead of just 128 rows. The performance using  $H'$  was even better, though still clearly distinguishable from ML decoding.

## REFERENCES

- [1] R. Lucas, M. Fossorier, Y. Kou, and S. Lin, “Iterative Decoding of One-Step Majority Logic Decodable Codes Based on Belief Propagation,” *IEEE Trans. Commun.*, vol. 48, pp. 931-937, June 2000.
- [2] D.J.C. MacKay, “Relationships Between Sparse Graph Codes,” (*unpublished*) *proceedings of IBIS 2000*, Japan.
- [3] J.S. Yedidia, J. Chen, and M. Fossorier, “Generating Code Representations Suitable for Belief Propagation Decoding,” *Proceedings of the 2002 Allerton Conference on Communications, Control and Computing*, pp. 447-456.
- [4] S. Lin and D.J. Costello, Jr., *Error Control Coding: Fundamentals and Applications*, Prentice-Hall, 1983.
- [5] C. Di, D. Proietti, I.E. Teletar, T.J. Richardson, and R.L. Urbanke, “Finite-Length Analysis of Low-Density Parity-Check Codes on the Binary Erasure Channel,” *IEEE Trans. on Information Theory*, vol. 48, no. 6, pp. 1570-1579, June 2002.